


SMARTLIFE - SMART LIVING APP





- Scan QR code to download Tuya APP or Search Tuya on App store to download it.

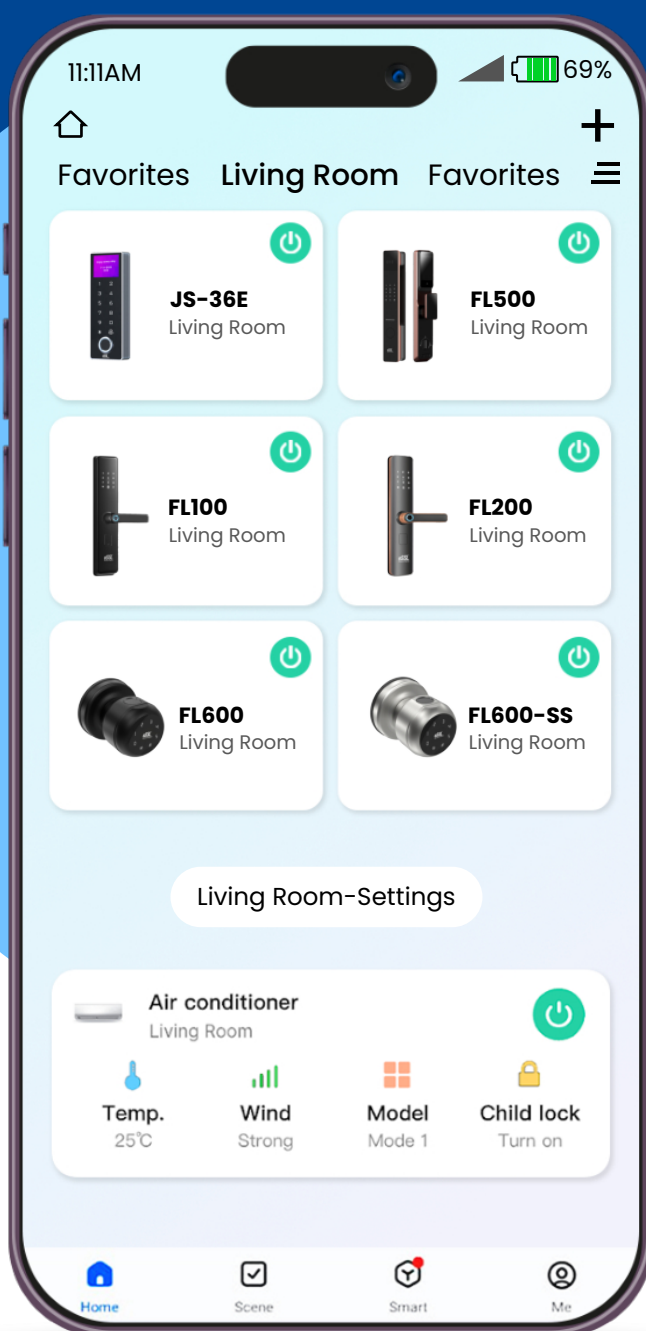



Press ***** **Master code** **#** **0** **#** **5** **#**
on the access control Keypad for WIFI matching.

- Note : Master Code for each Biometric Access Device and Smart Locks may vary (Please contact Technical team for further assistance) !
- Open Smart life Smart Home APP to add new equipment
- Click '+' Symbol and Add a Device

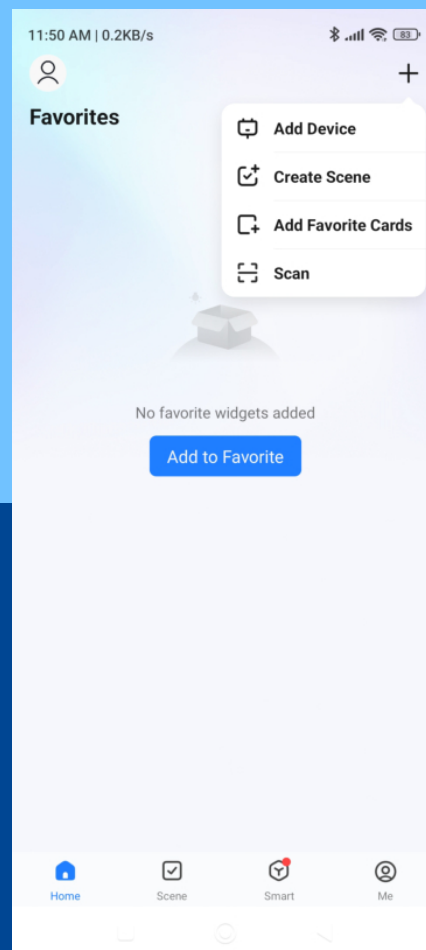
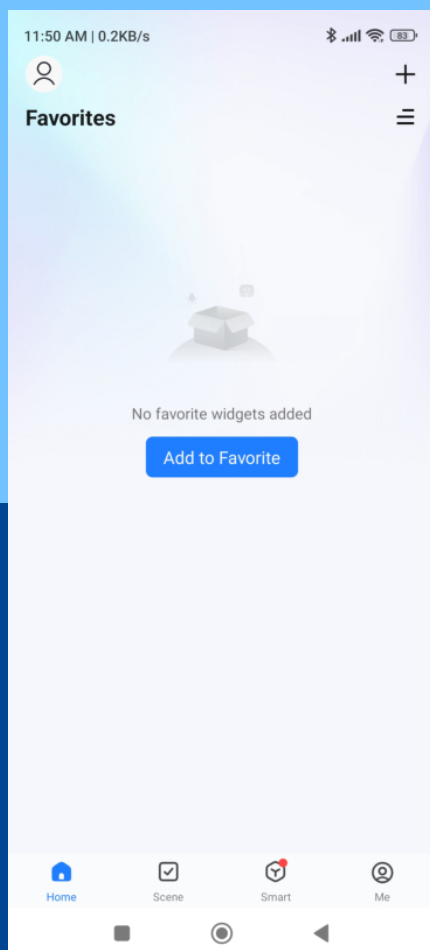


- Connect with available devices, click "Next".



- Choose Wi-Fi and enter password, click "Next".

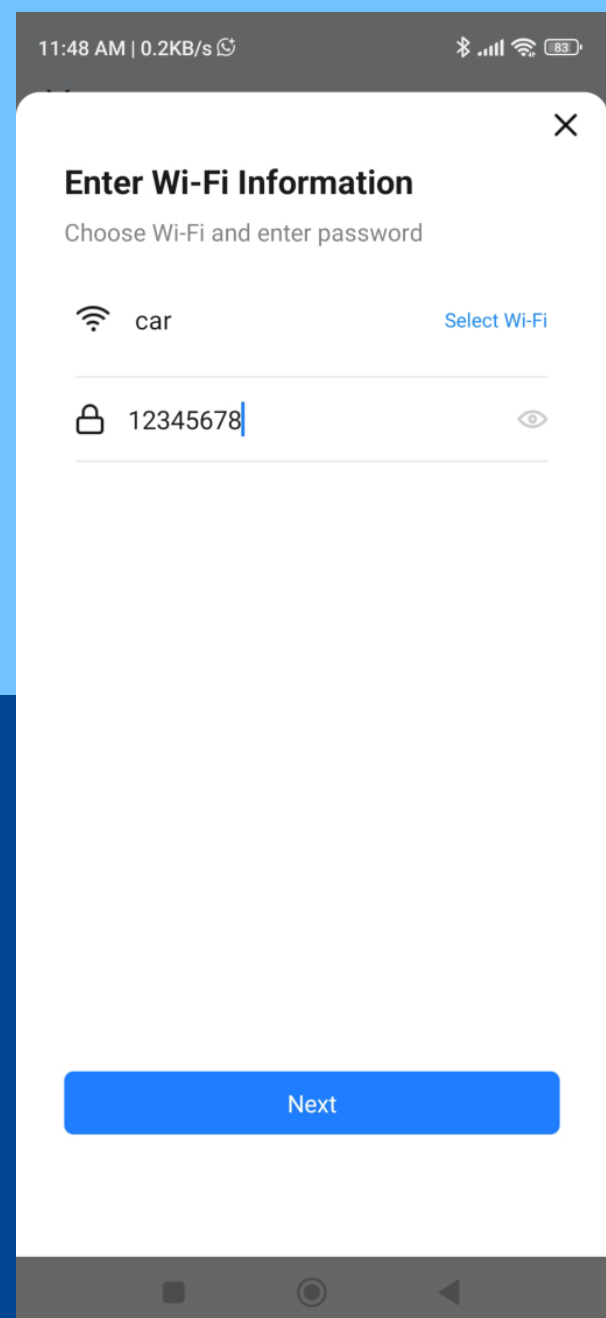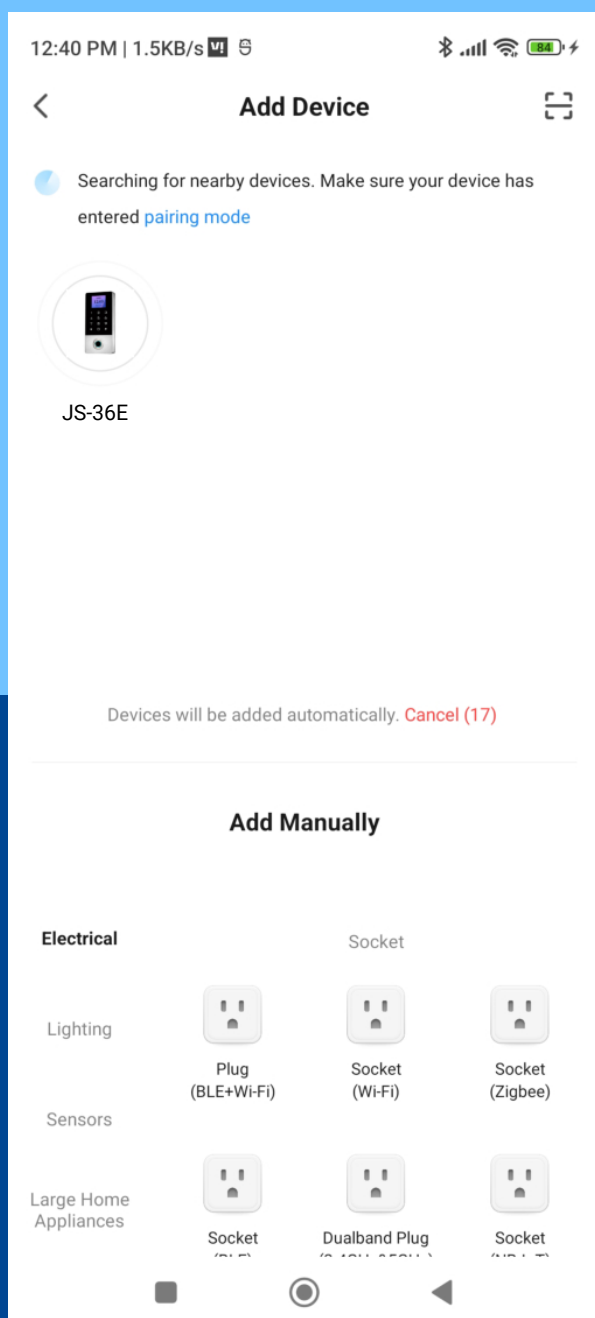



- Connection will be in Progress, Once Added successfully, click "Done".
- Now Device is added and will be seen in "Favorites" Home Page

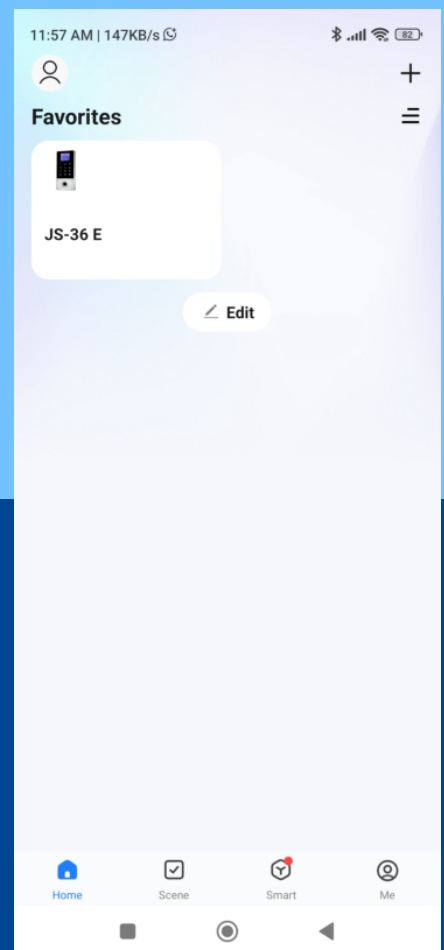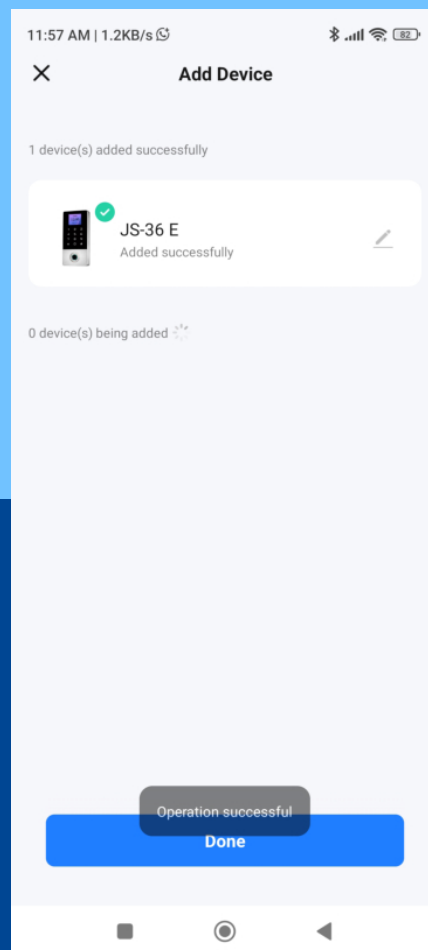



- Click on the added Device "JS-36E"
- Now Device Option can be seen,
- Remote Unlock Option
- Member Management
- Temporary Code
- Settings

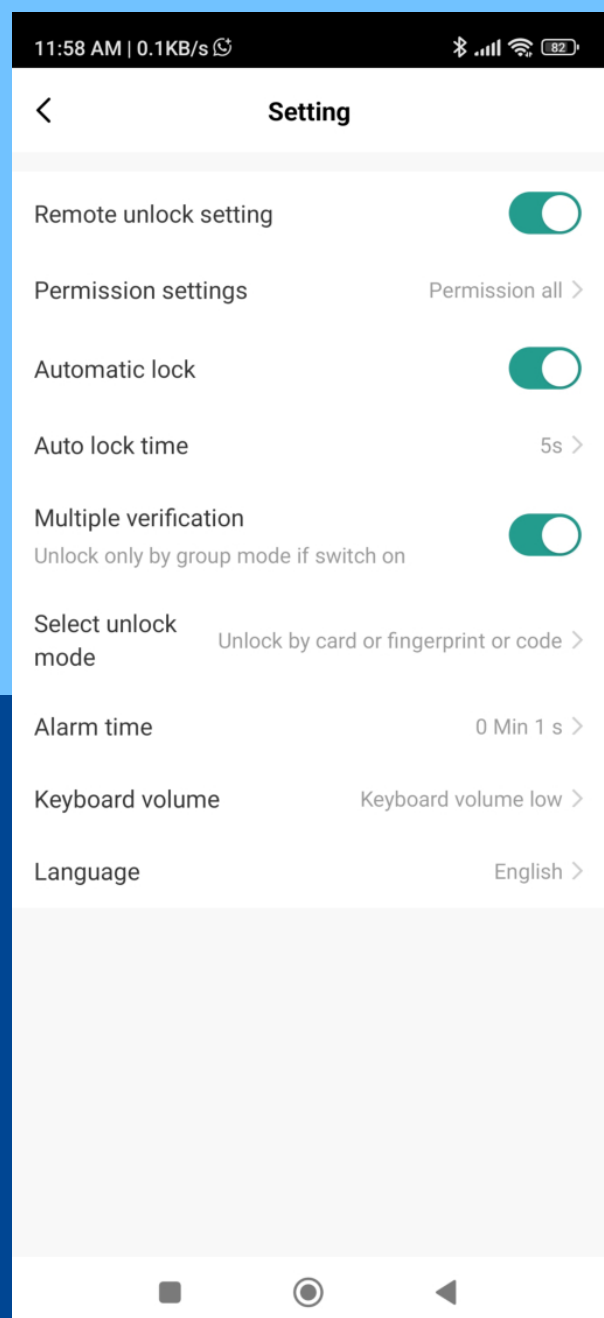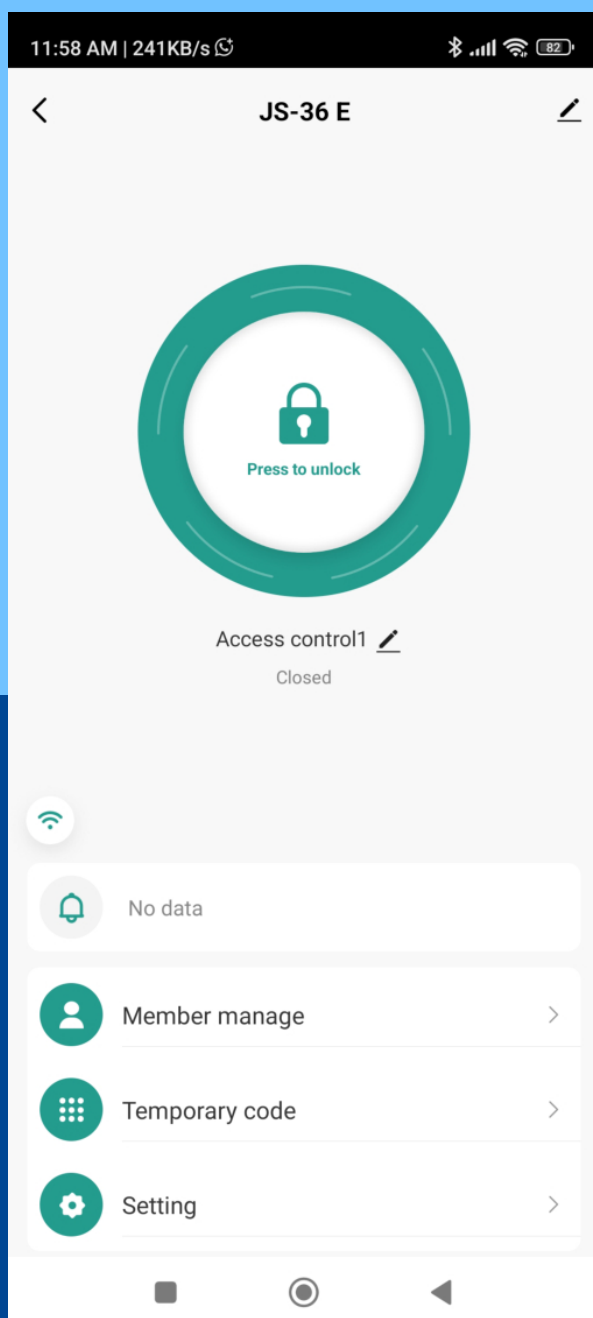



- Press and Hold "Press to unlock" button to open lock remotely
- Click Member Manage - To add Members/ Users to the device

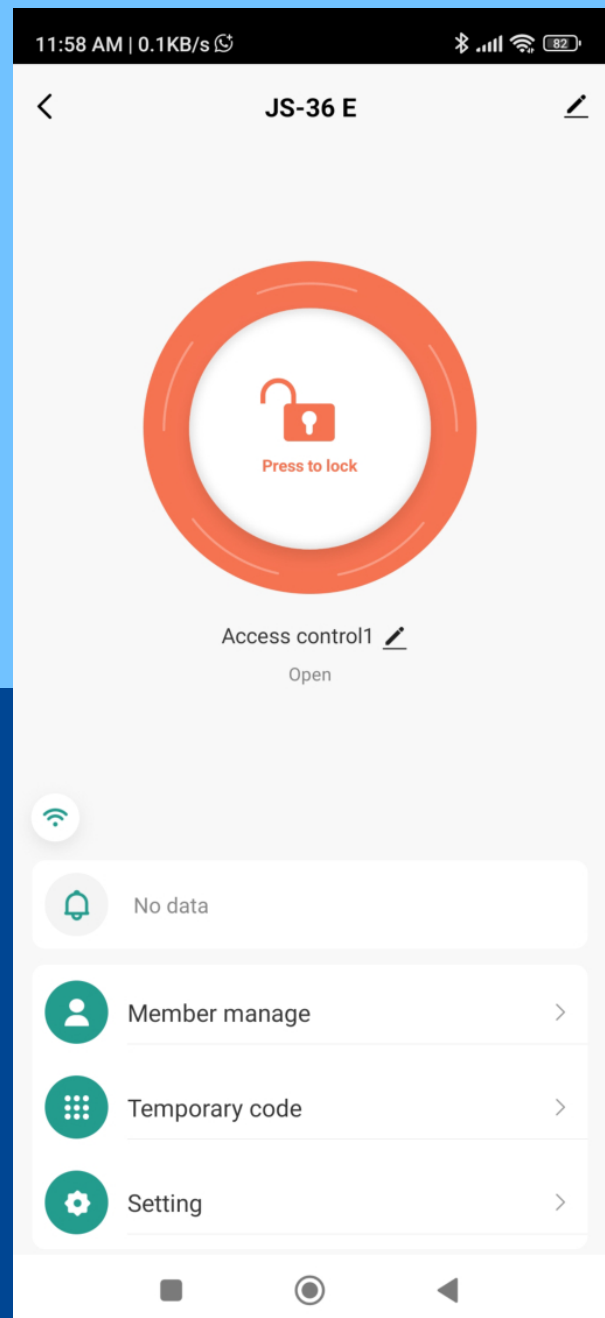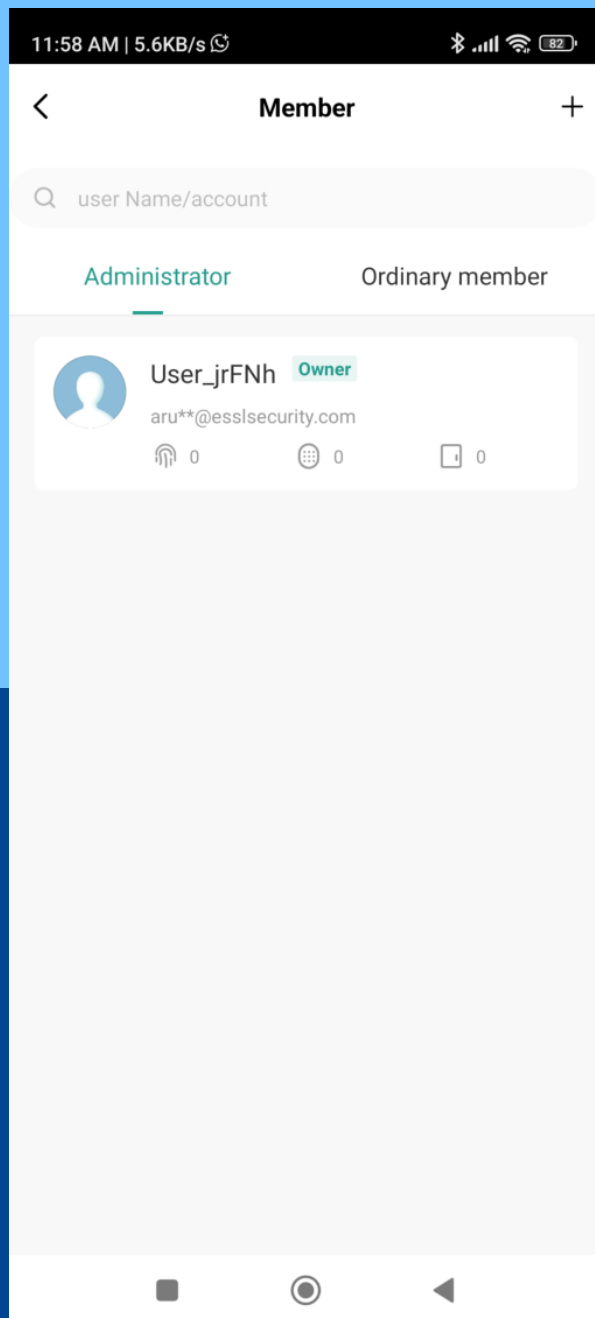



- Click "+" to add user, fill in name and details
- Then click on Users to "Add" Fingerprint , Code , Card etc

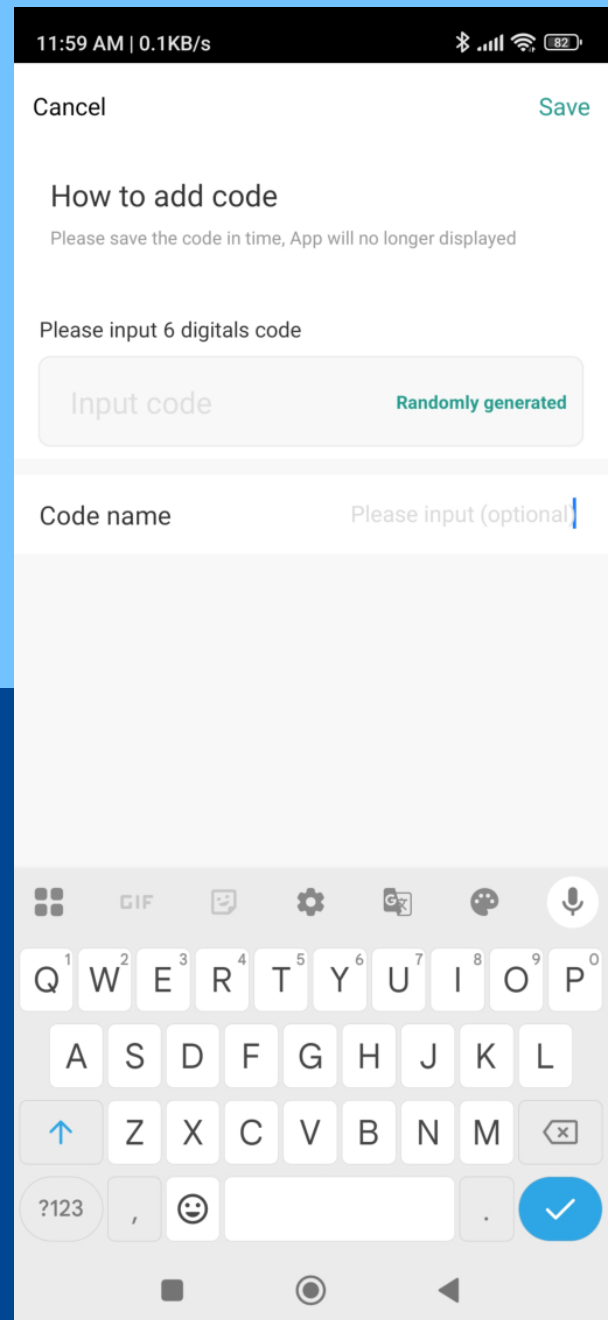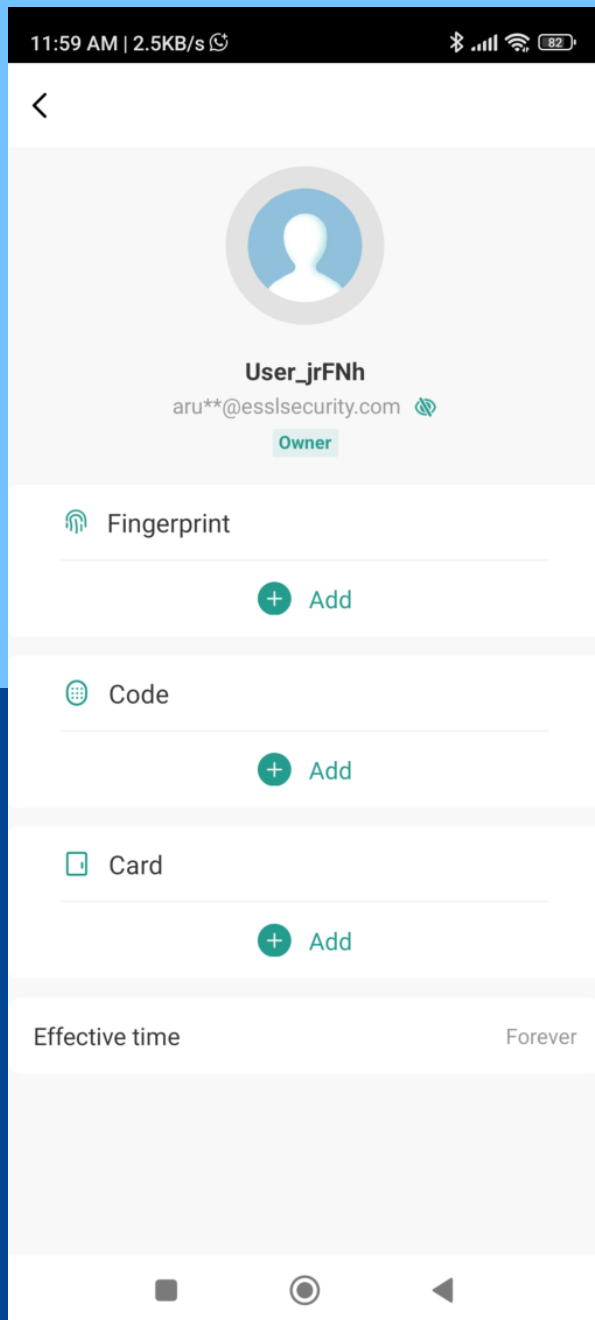


- Add card by clicking start add

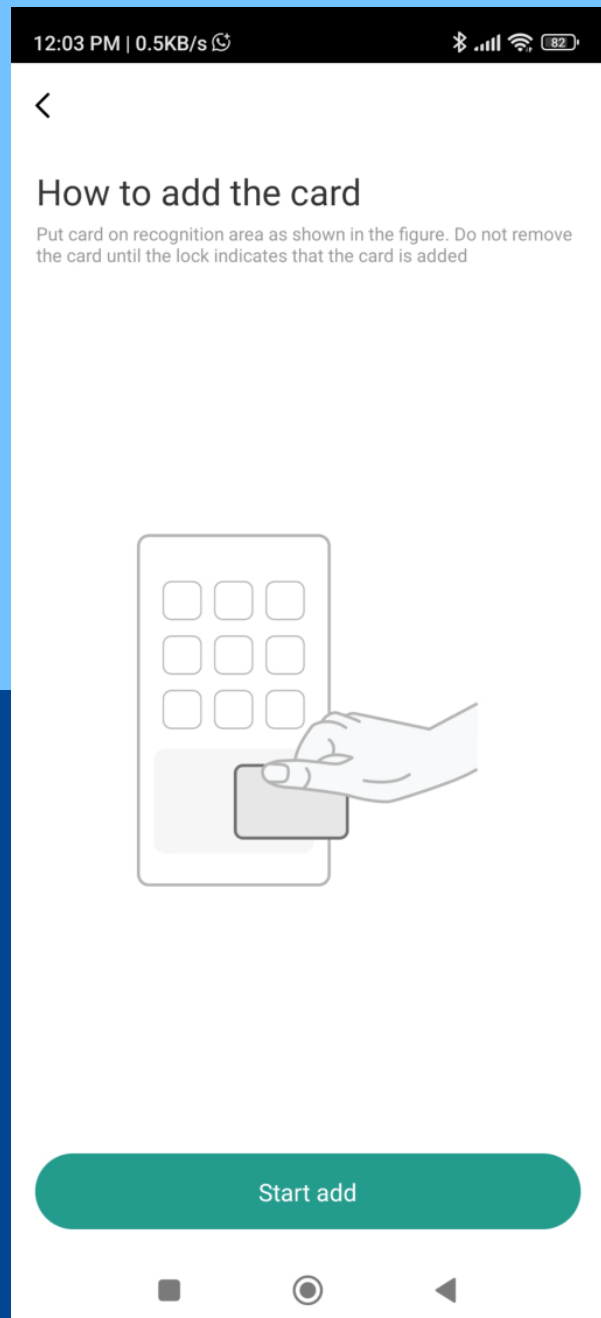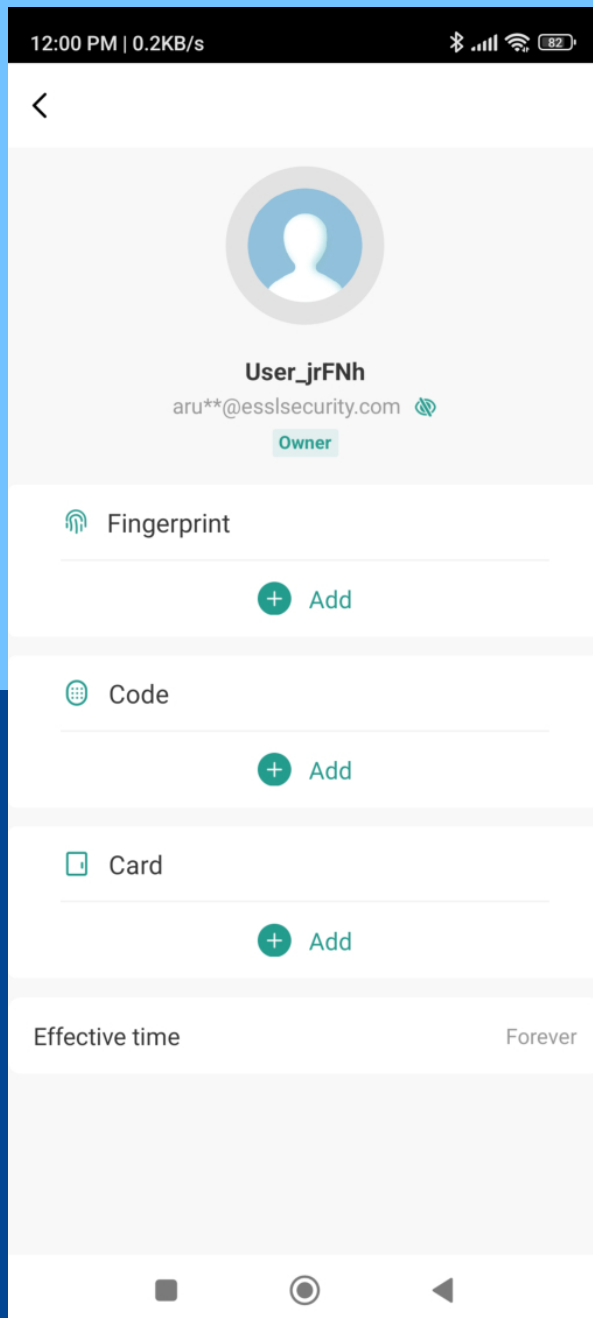


- Swiping one card within 60 seconds, add card successfully, then fill card name and click "Done"

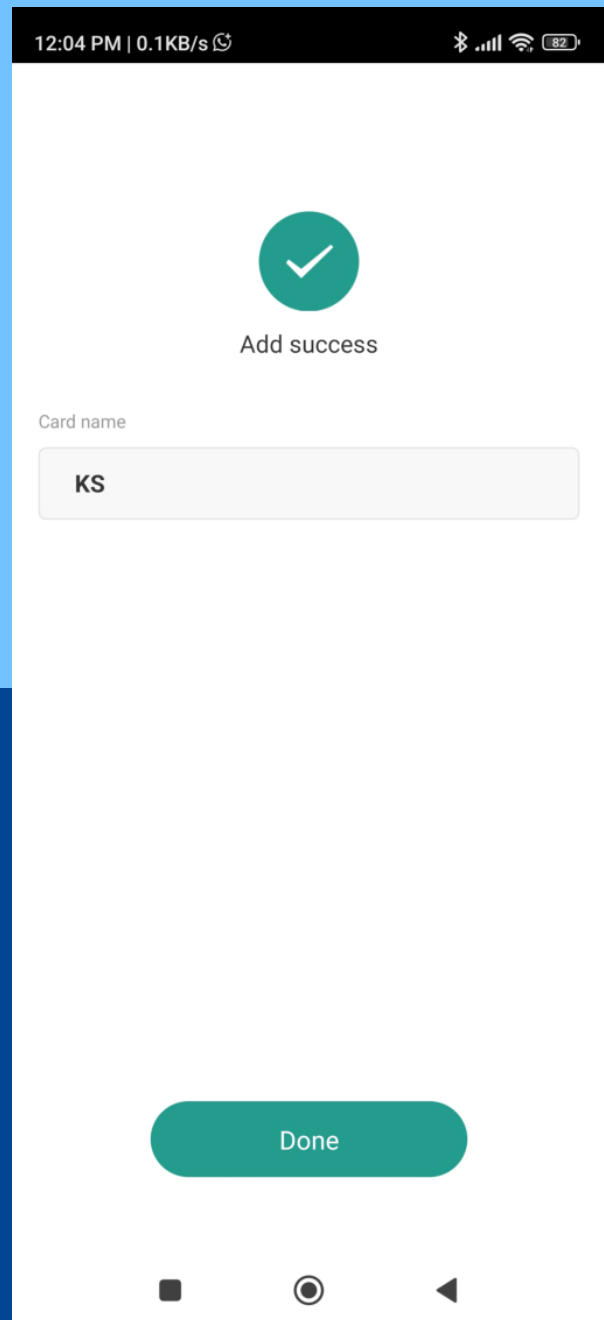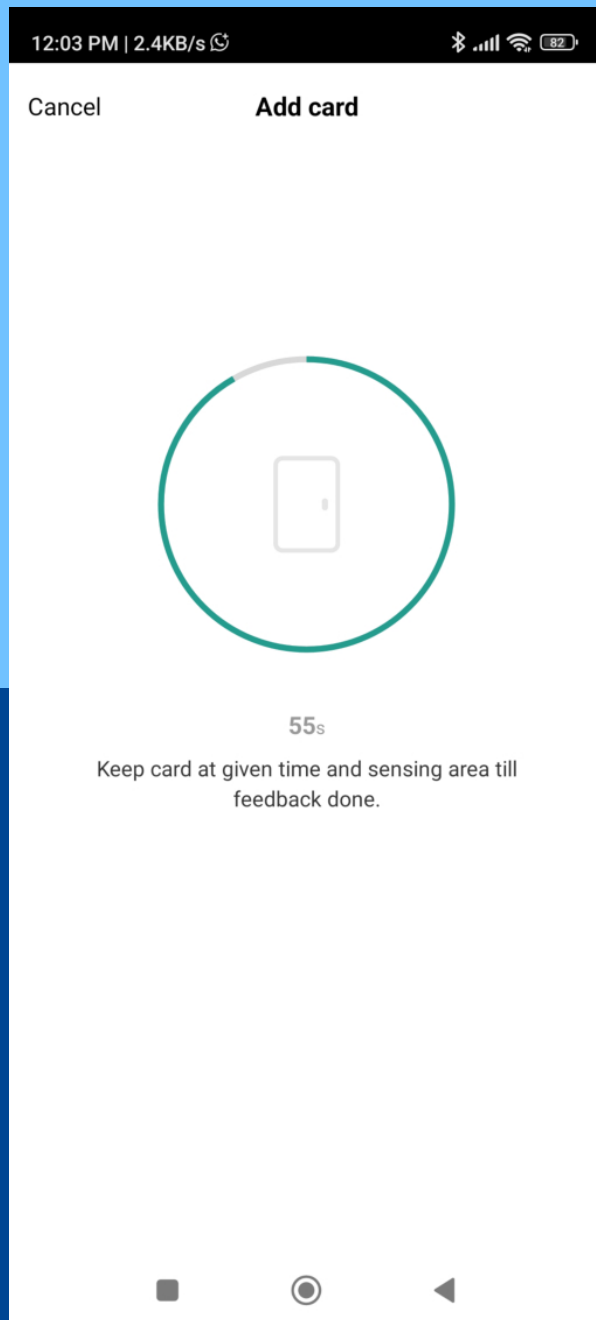


- Delete code user, click "delete code", user code will be deleted.
- Notice: if delete user(KS), her code/card wont be deleted directly.

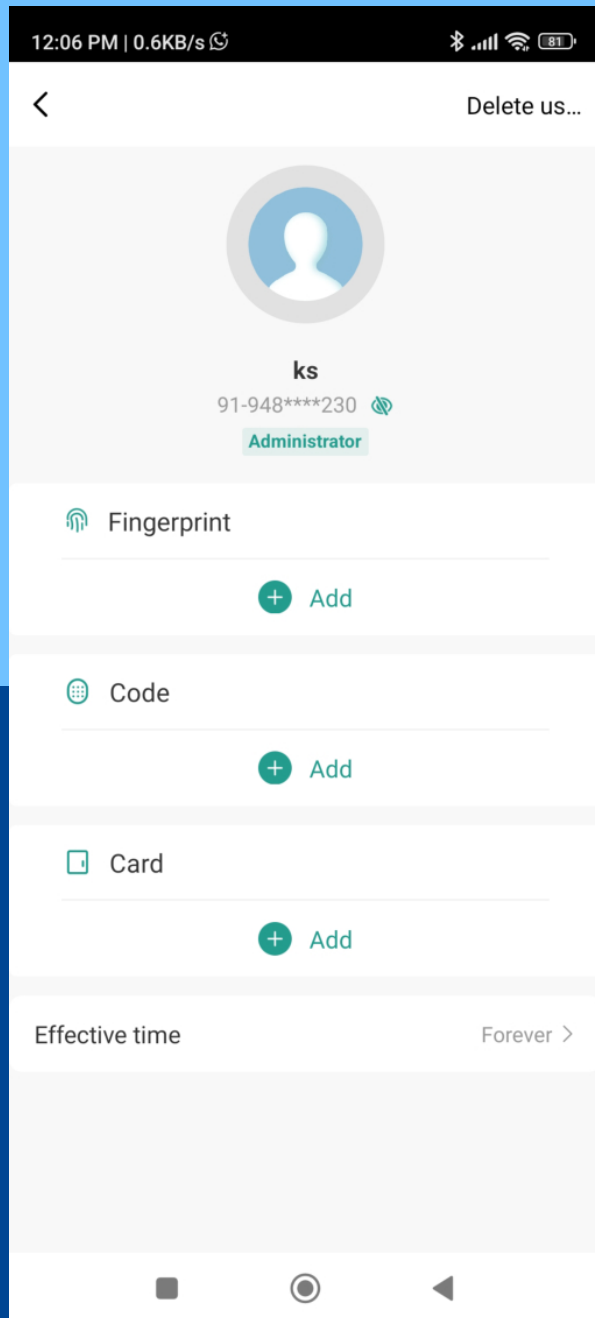

- Delete card user, click "delete card", card user will be deleted.
- Notice: if delete user(KS), his code/card wont be deleted directly.

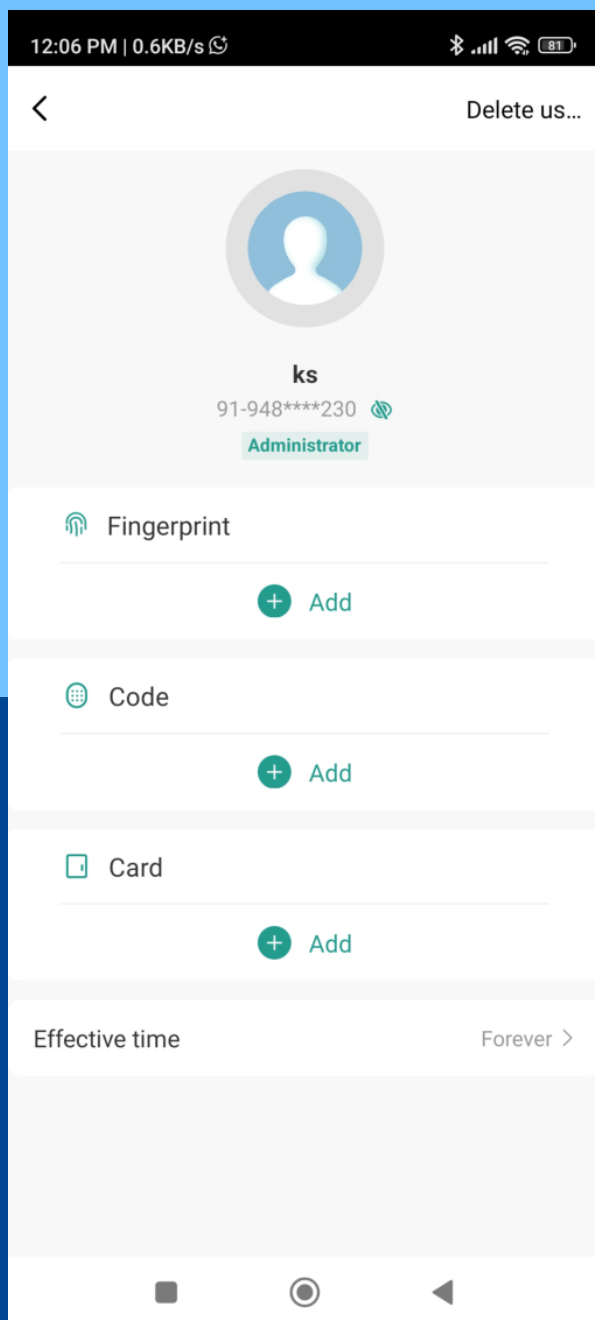

- Add ordinary user by clicking ordinary member and then Plus"+" symbol

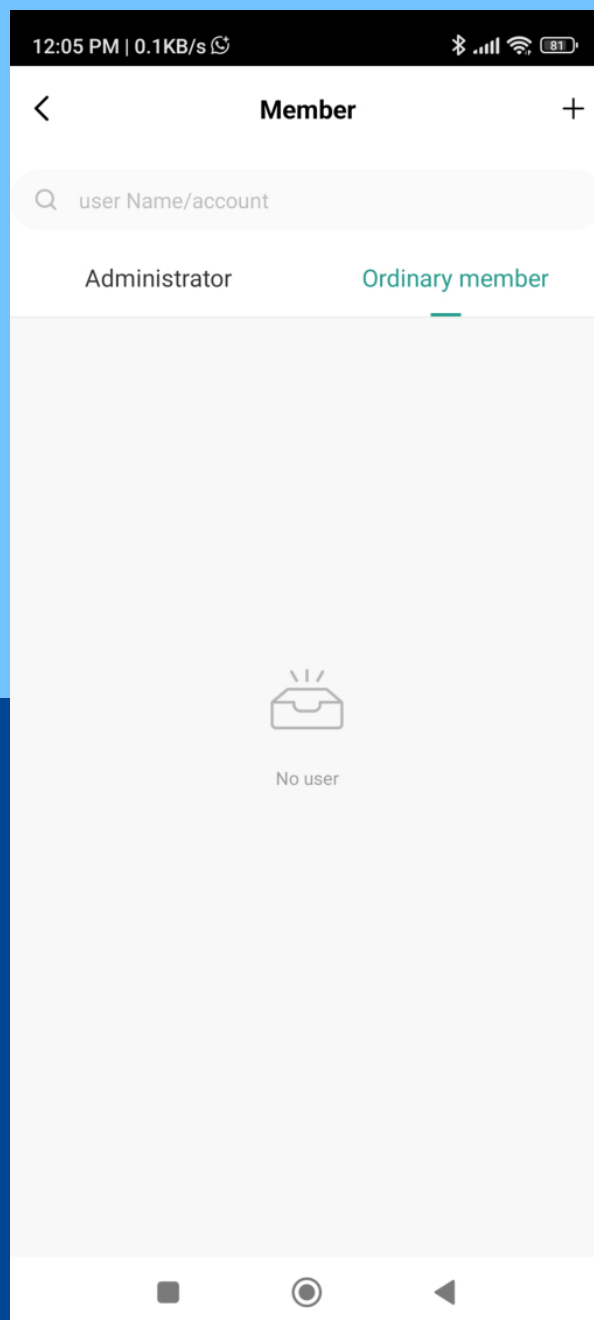

- Then input the related information and click "Next step".

12:05 PM | 0.1KB/s

Cancel Add user Next step

User name Please input

Country/area India +91 >

User account Input phone No. or e-mail

Administrator ☒

Administrators can manage devices and members, but members can only read unlock & alarm records

12:06 PM | 0.6KB/s

< Delete us...


ks
91-948****230 
Administrator



 Fingerprint
+ Add

 Code
+ Add

 Card
+ Add

Effective time Forever >

Add code user by clicking add temporary code custom, and inputting six digits code or clicking randomly generated, then input code name.

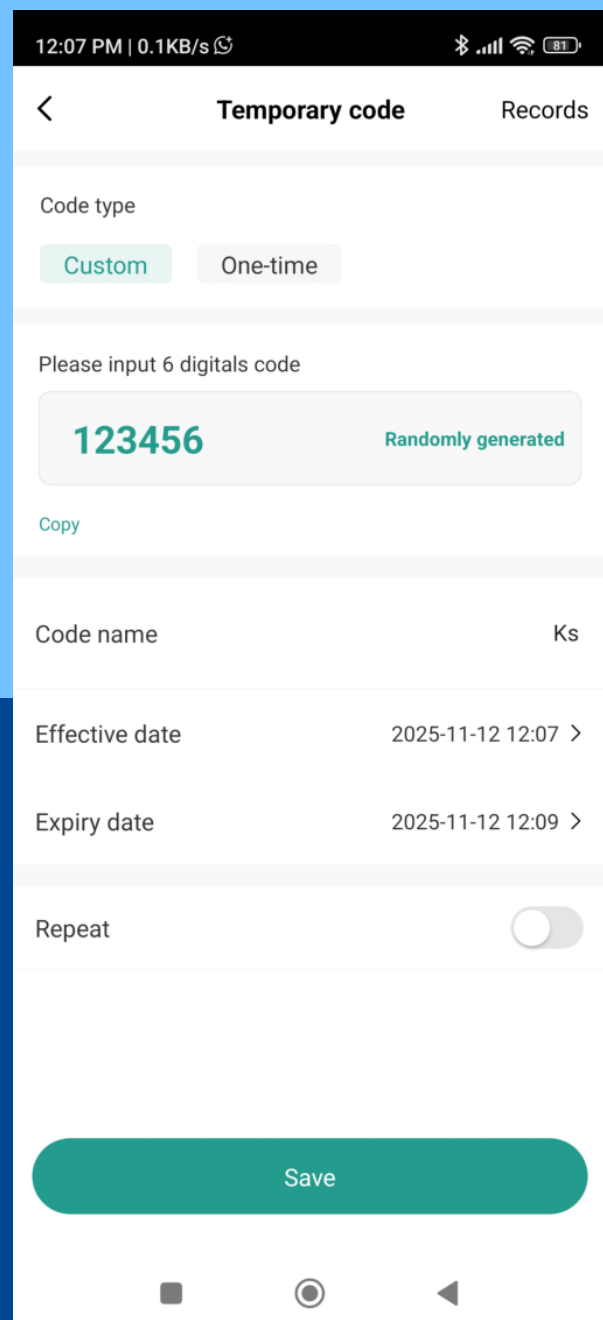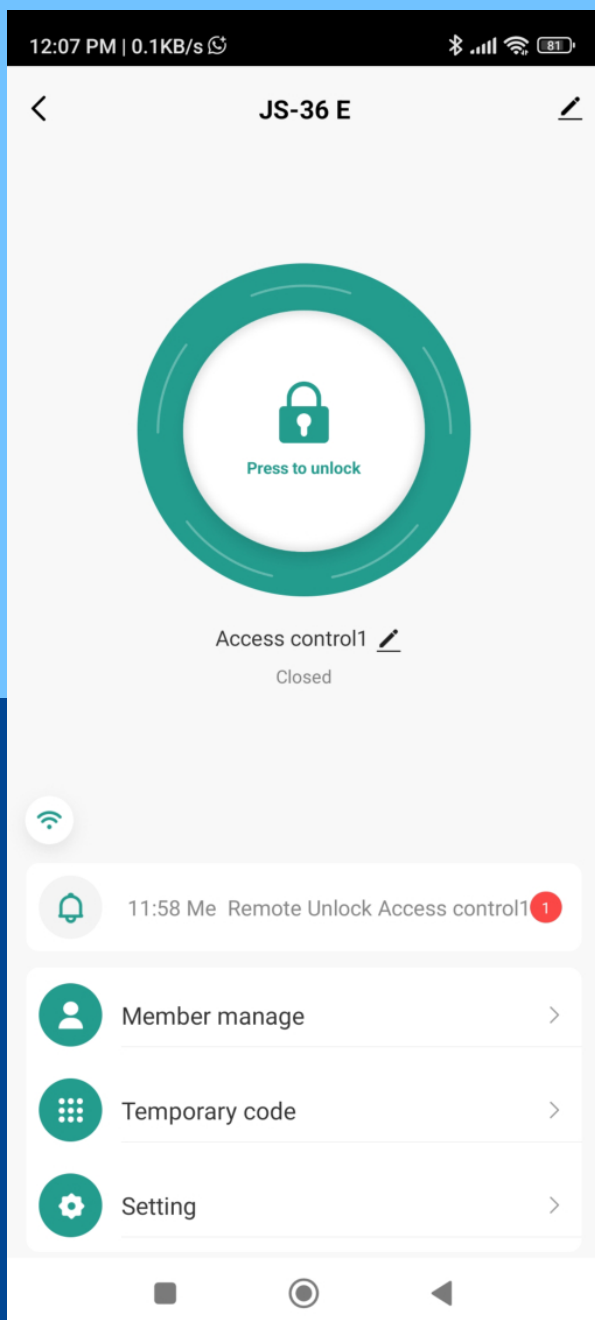

- Set effective time and Ineffective/Invalid time, click "Done/Save".

12:08 PM | 0.1KB/s

< Temporary code Records

Code type

Custom One-time

Please input 6 digitals code

123456 Randomly generated

Copy

Code name Ks

Effective date 2025-11-12 12:07 >

Select Date

2025	11	12	12	09
2026	12	13	13	10
2027	14	14	14	11

Cancel Confirm

12:07 PM | 0.1KB/s

< Temporary code Records

123456

Code name Ks



Effective time 2025/11/12 12:07

Invalid time 2025/11/12 12:09


Done

Share


- To Add One time code,click "One time " ,input code name,
- Click "Save offline code", Done
- Notice:The code valid time for 6 hours and only can be used once.

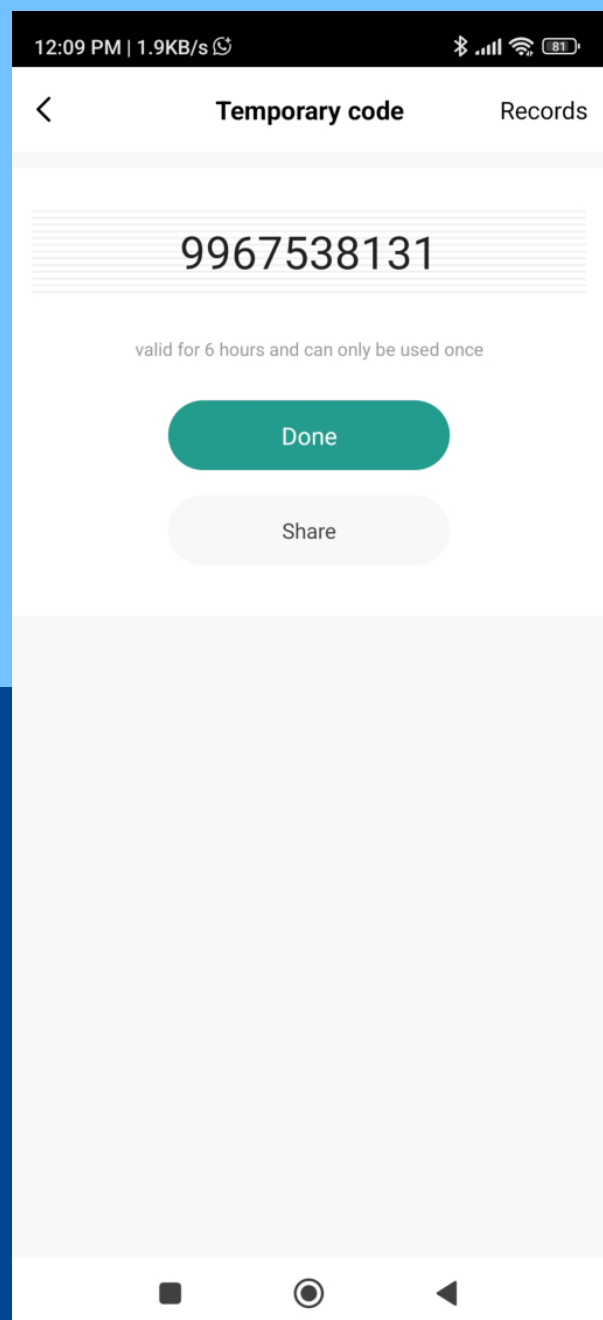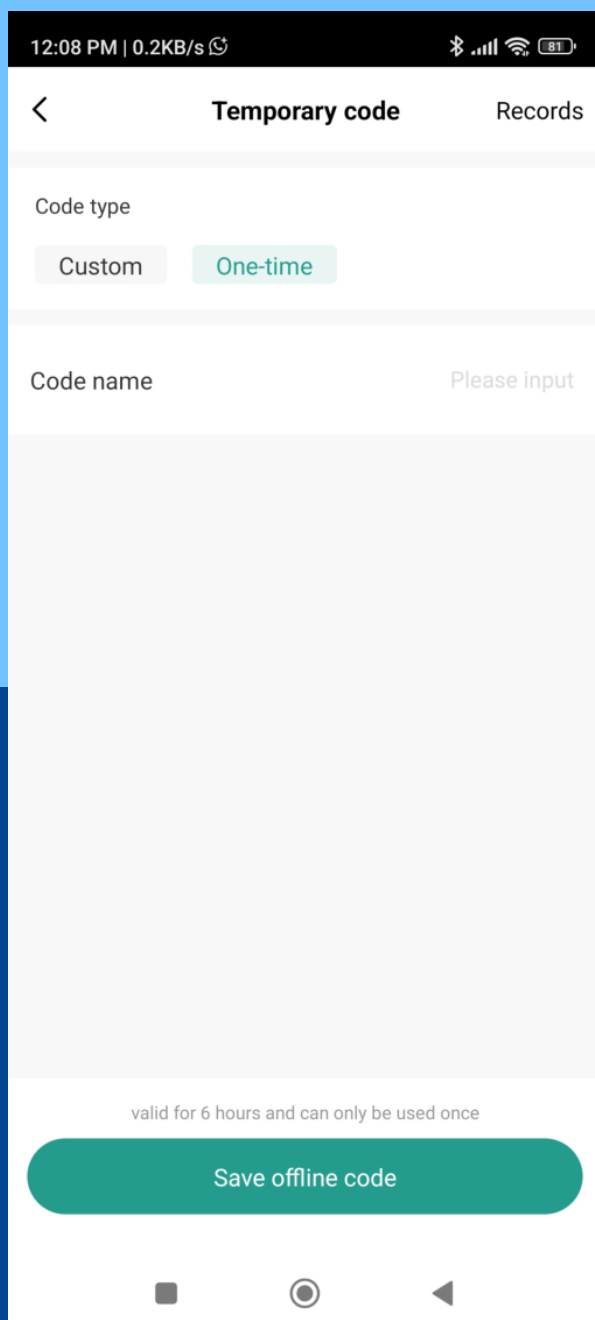

- Access Logs with User name and Time can be checked in "Logs Page "

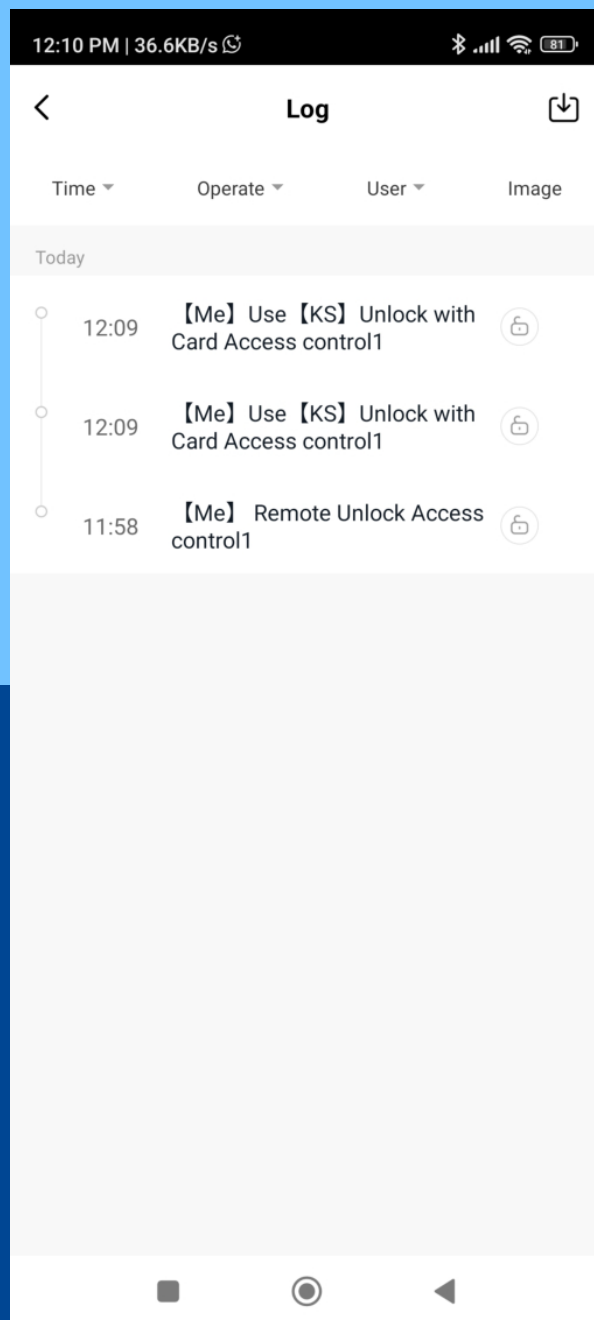

Manage Time & Attendance for all your Branches from Head Office

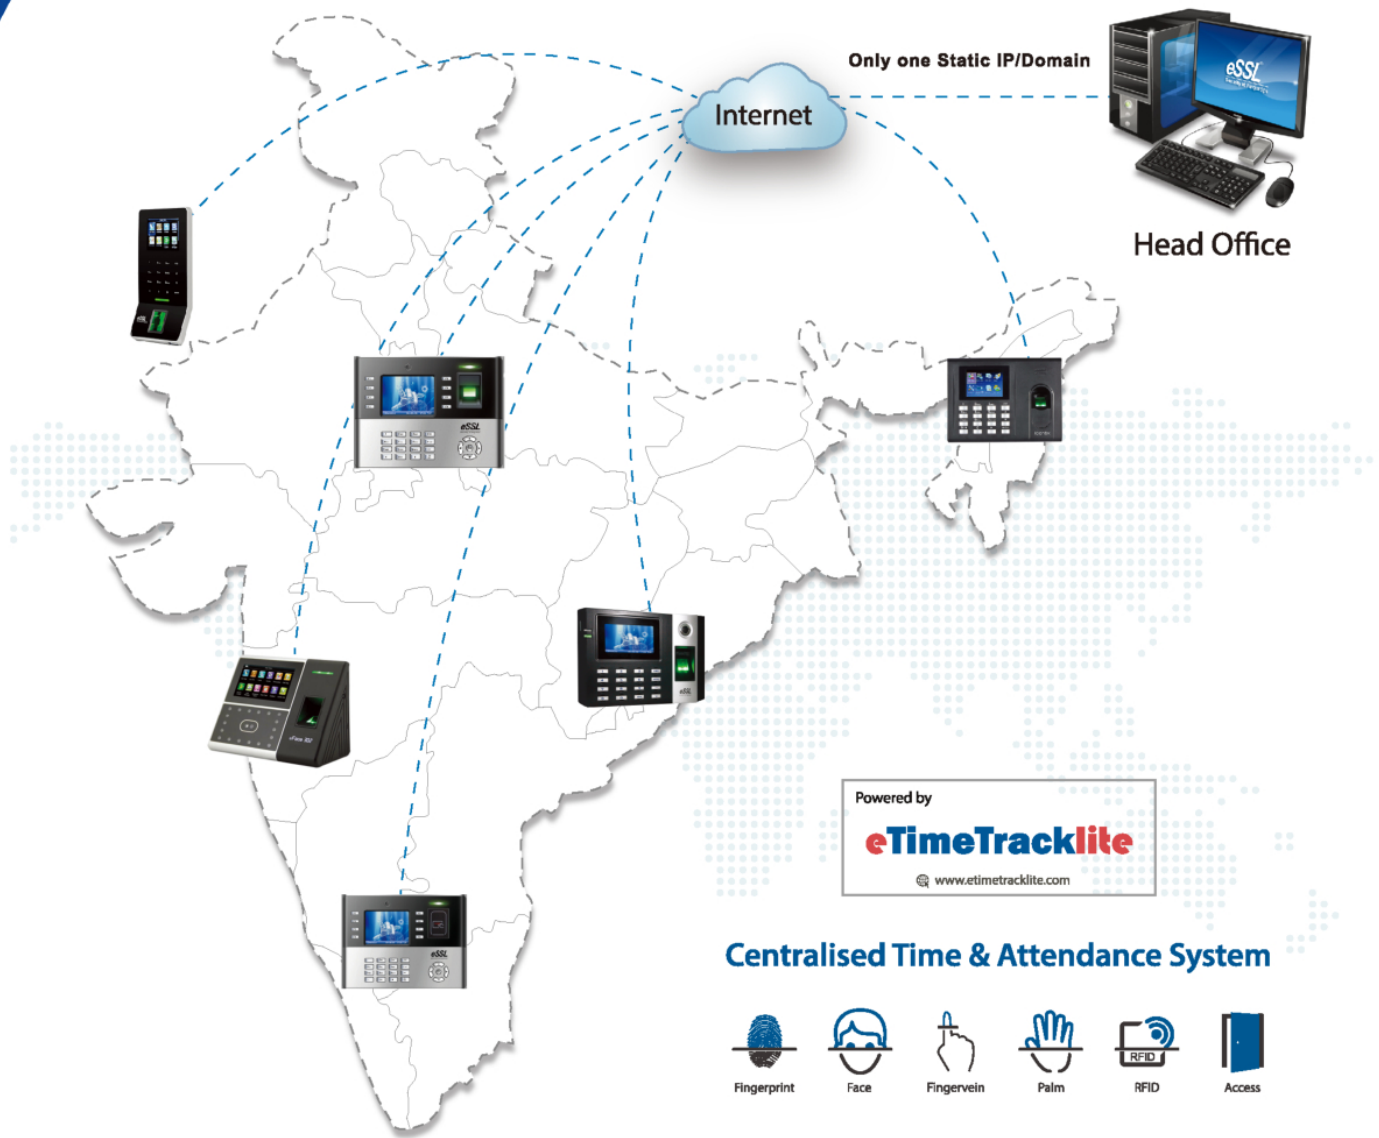

Disclaimer : Specifications can be changed without prior notice.

1. **Buying and Selling eSSL products online is prohibited and is termed as illegal**
2. Installation / Technical support / Training to end user is the responsibility of the installer or dealer
3. eSSL do not support end user directly, if they want support charges will be applicable



Enterprise Software Solutions Lab Pvt. Ltd. (Corporate-Office)

#24, 23rd main, Shambhavi Building, J P nagar 2nd phase, Bengaluru - 560078

www.esslsecurity.com | sales@esslsecurity.com | Ph : 91-8026090500