




SpeedFace-V5

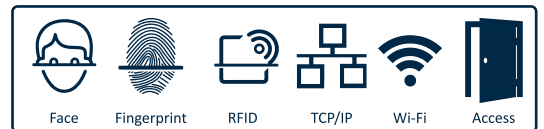

▶ High Speed Face Authentication System

Specifications

Capacity

User Capacity : 10,000
 Face Capacity : 6,000 (standard) / 10,000 (optional)
 Fingerprint Capacity : 10,000
 RFID Capacity : 10,000 (Optional)
 Log Capacity : 2,00,000

Hardware

LCD : 5inch touch screen
 CPU : Quad-core A17 1.8GHz
 Memory : 2GB RAM / 16GB ROM
 Camera : 2MP dual lens

Communication

TCP/IP, RS485 for external reader
 Access : Door lock, door sensor, alarm, exit button and auxiliary input
 Audio : Loudspeaker

Operating

Voltage : 12V 3A
 Temperature : -10°C ~ 45°C
 Humidity : 10%~90%

Features

- 6,000 facial users capacity, maximum, 10,000 facial users
- ID/MF optional
- 5-inch touch LCD
- Compatible with external RS485 and Wiegand reader
- TCP/IP, Wi-Fi communication
- High performance processor with deep learning algorithm
- Accurate and fast face recognition
- Dual-camera for live face detection
- Face recognition distance: 0.3 m to 1 m

Optional Accessory



RS485
Fingerprint Reader



RFID Reader



Exit Button



Electric Lock



Alarm



Sensor

Dimensions (mm)

