




eSSL-SP-2 [Thermal Printer]

Serial Thermal Printer with Adapter

Interfaces	Serial(RS232)
Printing Method	Thermal Line Printing
Paper Width	58mm (2 inch)
Paper Thickness	55 to 75 GSM
Printer speed	70mm/Sec
Printer core life	75 Kms
Print commands	ESC
Resolution	8dots/mm (203dpi)
Print Commands	ESC/POS Compatible Command Set
Data Buffer	4K Bytes
Printable content	
English	Yes
Alpha numeric	Yes
Symbols	Yes
Regional language	Yes
Images	Yes
Bar code	Yes (UPC-A, UPC-E, JAN13, JAN8, CODE39, ITF, CODABAR, CODE93, CODE128)
QR code	Yes
External Image storage	Yes

Built in font	Yes
	Paper Detection, Platen Detection, Head Temperature Detection, Power Auto Off Control, Manual Turn Off, Buzzer and LED indications.
Other Features	
Battery	No
Power adapter	Yes
Cutting method	Manual
Standard accessories	USB to DB9 Cable, Adaptor, CD, Paper Roll, Belt Clip
Windows SDK	Yes
Linux Driver	Yes
Characters per Line	48 (8 x 16 pixels), 42 (9 x 24 pixels) and 32 (12x24 pixels)
Weight	250 Grams
Body	Plastic ABS (Fire Resistant Grade)
Body Color	Black
Paper loading	Drop Inn Easy Loading
Durability	
Working Conditions	Temperature :- 10°C ~50°C, Humidity : 10%~90%
Storage Conditions	Temperature :- 200C~70°C, Humidity : 5%~95%
Certification	BSS (Under Process)

PRODUCTION DIMENSIONS

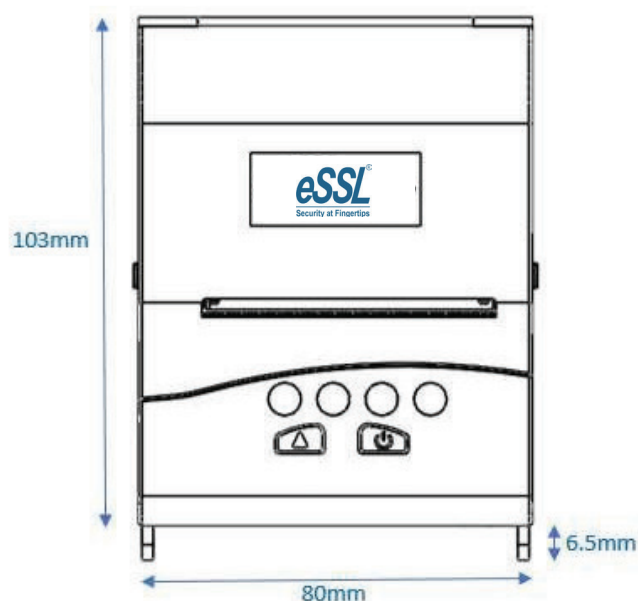

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development
 Visit Us at: www.esslsecurity.com