


EM lock Single door, 2 wires

EML300

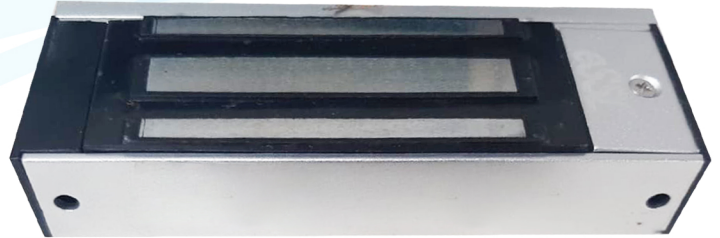

Specification

Current Draw : 200 mA @ 12V DC; 100mA@24V DC

Holding Force : 300 Lbs (136 Kgs)

Dimensions : 132L x 42W x 28T

Armature Plate : 110Lx 40W x 10T

Features

Voltage Tolerance : 15 %

Voltage Input : 12/24V DC

Operating Temperature : 0-55°C

Anti Rust Surface Treatment : Blue Zinc plating /

Nickle Chrome Plating