





Technical Specification:

Power Supply: AC 230V 50/60Hz

Power of motor: 80W

Current: 8A

Transformer: 100WNoise level: <65dB

Force: 30N

Operating temperatures: -25°C to 65°C


RPM: 20 RPM

Protection class: IP20Fuses: 220V 1A - 24V 10A

Feature:

- 1. Automatically reverse safety system.
- 2. Easy manual operation in case of power failure.
- 3. One button remote control with step by step control mode.
- 4. Selectable Auto-closing function.
- 5. All settings retained even after power failure.
- 6. Magnetic sensor Limits for maximum reliability in dusty conditions.
- 7. Auto Courtesy light.
- 8. Optional safety beam sensors (recommended) stop the door before contact with an obstruction.
- 9. Suitable for and sectional overhead and lift doors

Dimension

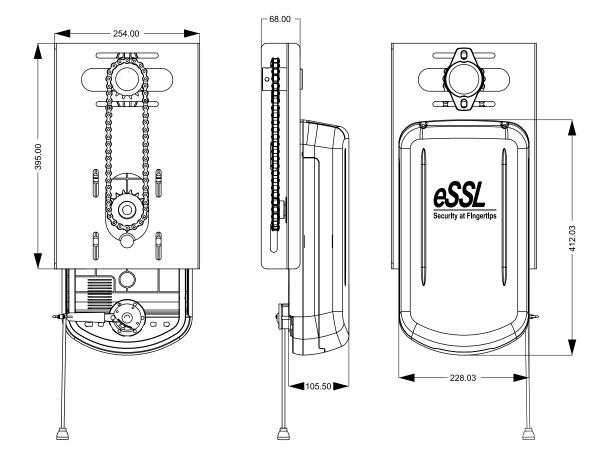

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development. www.esslsecurity.com

ISO № C€ ROHS